

SONANCE




DIGITAL AMPLIFIER DATA SHEET

SONAMP 2-100 MULTI-CHANNEL POWER AMPLIFIER

TECHNICAL SPECIFICATIONS

SKU	93091
UOM	Each
Number of Channels	2 (1 stereo pair)
RMS per Channel @ 8 Ohms	100 watts (2 channels driven)
RMS per Channel @ 4 Ohms	156 watts (2 channels driven)
RMS per Channel Bridged @ 8 Ohms	325 watts
Frequency Response	5Hz-50kHz
Distortion (1kHz) @ 8 Ohms	0.15%
Distortion (1kHz) @ 4 Ohms	0.1%
AC Voltage	100-120V@60Hz, 220-240V@50Hz
AC Fuse	5A (T5AL - 250V)
Dimensions + Feet (WxHxD)	8.625" x 2.125" x 16.8125" (219mm x 54mm x 427mm)
Dimensions + Rack Ears, No Feet (WxHxD)	19" x 1.75" x 16.8125" (482mm x 44mm x 427mm)
Rack Space Requirement	1U - 1/2 Rack Width
Shipping Weight	10 lbs. (4.53kg)

DIMENSIONAL DRAWINGS

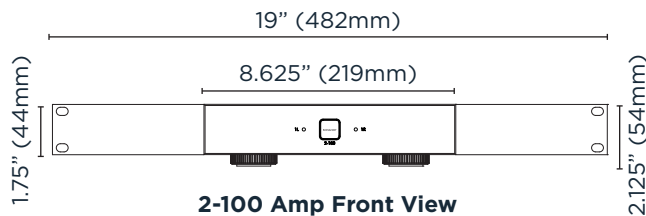

OPTIONAL ACCESSORIES

Rack Mount Bracket 93098

Note: Allows two 1/2 rack width amps to be rack mounted together in a 1U rack space.

ASSOCIATED PRODUCTS

SONAMP DSP AMPLIFIERS

DSP 2-150 MKII	93378
DSP 8-130 MKII	93331
DSP 2-750 MKII	93379

LIMITED TWO (2) YEAR WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2021 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • www.sonance.com • 03.17.2021